(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau

(43) International Publication Date 23 June 2005 (23.06.2005)



(10) International Publication Number WO 2005/056971 A1

Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

(33)

- (51) International Patent Classification7: E21B 7/28
- (21) International Application Number: PCF/CA2003/001921
- 22) International Filing Date:
- (25) Filing Lunguage:

English English


11 December 2003 (11.12.2003)

- (26) Publication Language:
- (71) AppHennts and (72) Inventors: ROTH, Raymond, G. [CA/CA]; 4977 Perth Rd., 107, R.R. #1, Gadshill, Ontario NOK 1JD (CA). LAK-ING, Roger [CA/CA]; P.O. Box 954, Simcoc, Onlario N3Y 5B3 (CA).
- (74) Agents: WONG, Jeffrey, W. et al.; Borden Ladner Gervais L.P. 100 Queen Street, Suite 1100, Ottawa, Ontario K1P 119 (CA).
- CZ, DE, DK, DM, DZ, EC, EB, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LK, LS, LT, LU, LV, MD, MD, MG, MK, MK, MX, MX, MI, NO, NZ, OM, KG, PH, PL, PT, RO, RU, SD, SE, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, US, UZ, VC, VN, YU, ZA, ZM, ZW.

 (84) Designated States (regional): ARIPO patent (BW, GH, GM, KB, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Burasian patent (AM, MZ, BY, KG, KZ, MD, RU, TI, TM, European patent (AM, MZ, BY, KG, KZ, MD, RU, TI, TM, EN, FR, GB, GR, HU, FR, CH, CY, CZ, DE, DK, EE, ES, PT, FR, GB, GR, HU, FR, CH, CY, CZ, DE, DK, EE, ES, PT, FR, GB, GR, HU, FR, TL, UM, MC, NL, PT, RO, SE, SI, SK, TR), OARI patent (BF, BJ, CF, CG, CL, CM, GA, GN, GQ, GW, ML, MR, NH, SN, TD, TG).
- Published:
- with international search report

For two-letter codes and other abbreviations, refer to the "Guids ance Notes on Codes and Abbreviations" appearing at the begin ning of each regular issue of the PCT Gazette.

(54) THE: METHOD AND APPARATUS FOR DIRECTIONAL DRILLING

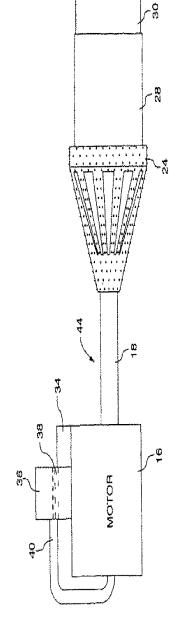

(57) Abstract: The present invention is directed at a pullhead/reamer for use in digging a hole in the ground; comprising a first end (22) shaped to receive a mandrel struts, connecting the first end to the second end, the struts defining a set of open flutes (48) therewithin, and a set of sturry jets (50); wherein when the pullhead/reamer is in use, the set of sturry jets release a pressurized liquid to mix with the ground producing a starry which enters the pullhead/reamer via the open flutes.

IV 1L69S0/S007 OM